




VIDEO TUTORIAL
of the installation



CLEANING &
MAINTENANCE

Components provided in the box • Componenti forniti nella scatola • Composants fournis dans la boîte • Componentes proporcionados en la caja • Komponenten im Lieferumfang enthalten


1x

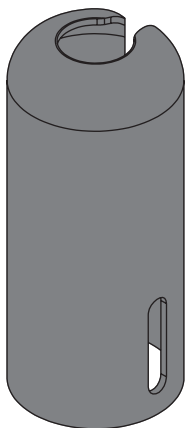

CERAMICECOVER


1

**DO NOT
CLOSE
THE
BRACKET!**

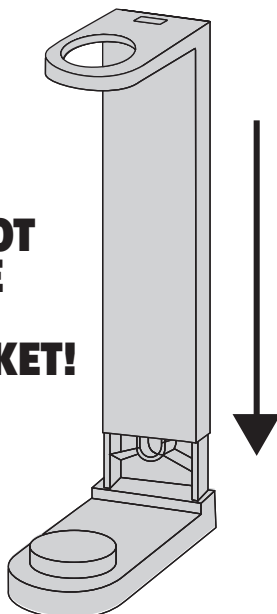

**INSERT THE TOP PART OF THE BRACKET
ONTO THE BASE WITHOUT CLOSING IT**

2

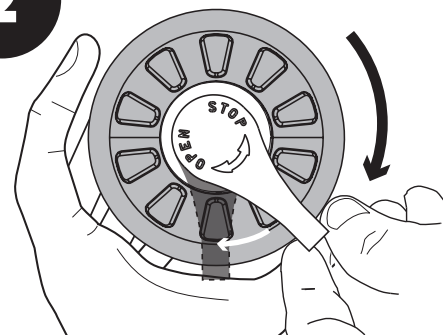


**OPEN THE PUMP
BY TURNING IT CLOCKWISE**

3

Components provided in separate boxes • Componenti forniti in scatole separate • Composants fournis dans des boîtes séparées • Componentes suministrados en cajas separadas • Komponenten werden in separaten Kartons geliefert

1x

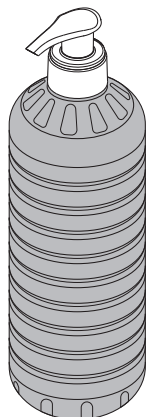


DISPENSER CARTRIDGE


1x

1x

1x



ABSBRACKET KIT

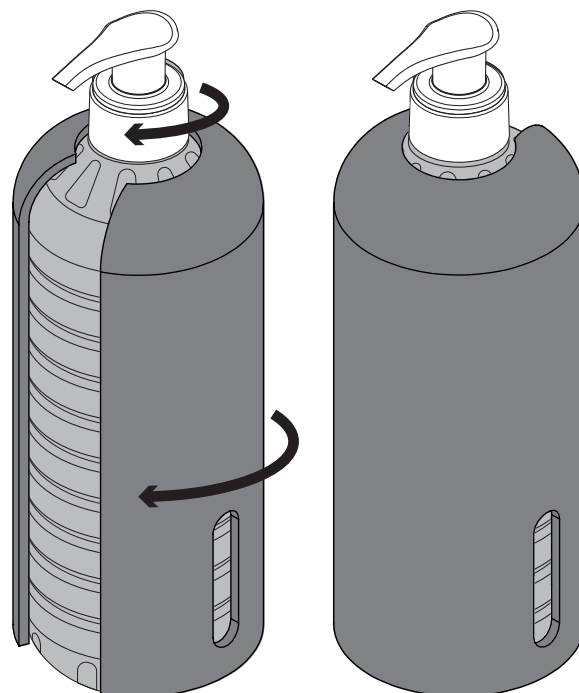


1. INSERT THE DISPENSER CARTRIDGE INTO THE CERAMICECOVER, PAYING ATTENTION TO THE POSITION OF THE PUMP
2. ONCE THE CARTRIDGE HAS BEEN INSERTED, ROTATE THE DISPENSER AND THE CERAMICECOVER UNTIL THE PUMP IS CORRECTLY POSITIONED AT THE FRONT OF THE PRODUCT



4



INSERT THE CERAMIC ECOVER WITH THE CARTRIDGE INTO THE UPPER PART OF THE BRACKET LIKE A STANDARD DISPENSER

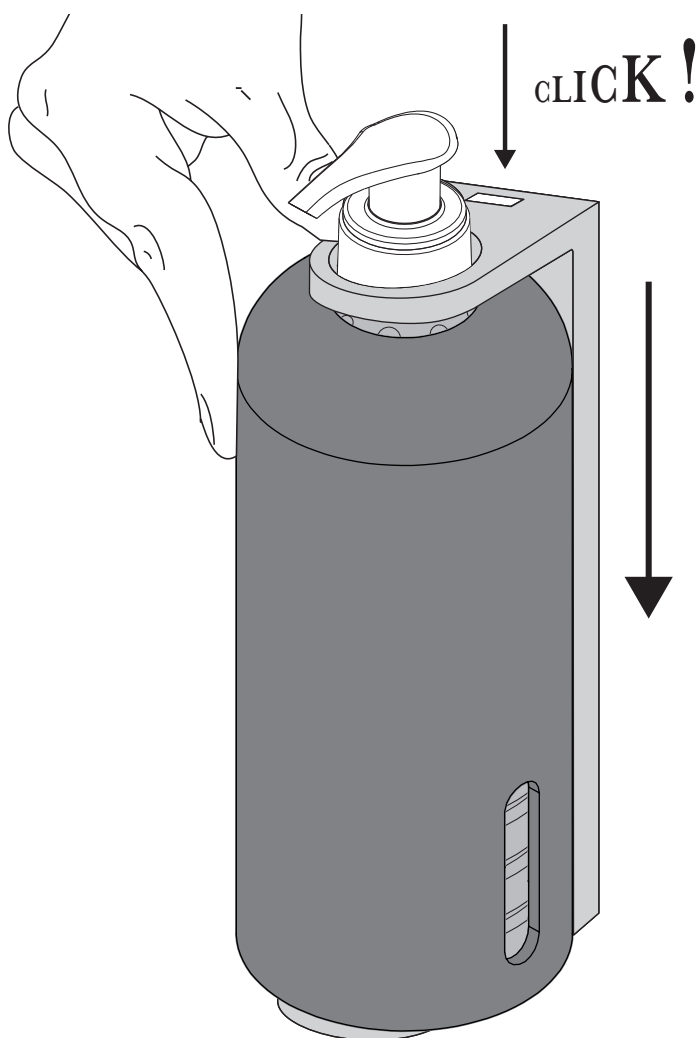

PLACE THE CERAMIC ECOVER WITH THE CARTRIDGE ON THE BRACKET BASE AND CLOSE THE SYSTEM (CLICK!)

5

change the cartridge

1. CHECK THE LEVEL OF THE CARTRIDGE: IF YOU CAN SEE THE BULK LEVEL NEAR THE BOTTOM OF THE CERAMIC ECOVER SLOT ON THE SIDE, IT'S TIME TO CHANGE THE CARTRIDGE!

2. TO REPLACE THE CARTRIDGE:

- USE THE KEY TO OPEN THE BRACKET
- REMOVE THE ECOVER FROM THE BRACKET
- ROTATE THE CARTRIDGE TO THE INITIAL POSITION SO THAT THE CARTRIDGE COMES OUT OF THE CERAMIC ECOVER
- REPLACE THE EMPTY CARTRIDGE WITH A NEW ONE

